Remove wheel caps.
Retension snow chains after driving for a short distance!
When driving with snow chains, do not exceed max. speed of 50 km/h!
On roads free of snow, drive with restraint for safety reasons and to protect chains.

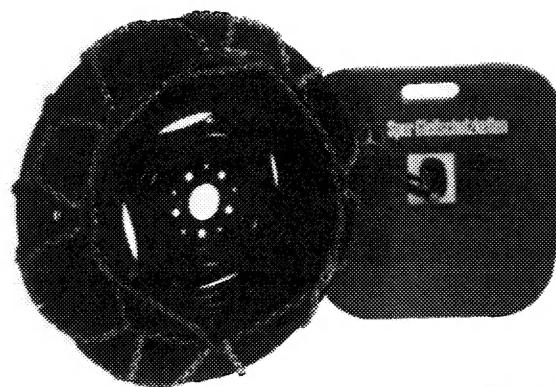**Mercedes-Benz non-skid chains with gripping studs**
(up to 1982)

| Tire size | Part no. | Code no.[1] |
|-----------|----------|-------------|
| 175 R 14 | 000 583 66 16 | 07 325 |
| 185 R 14 | 000 583 68 16 | 17 328 |
| 195/70 R 14 | 000 583 89 16 | 16 327 |
| 205/70 R 14 | 000 583 81 16 | 16 329 |
| 215/70 R 14 | 000 583 88 16 | 16 331 |
| 185 R 15 | | |
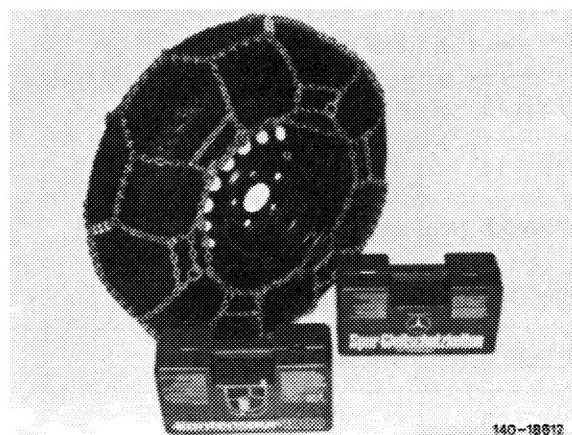
**Mercedes-Benz non-skid chains with gripping studs**
**RUD-matic system** (starting 1983)

| Tire size | Part no. | Code no.[1] |
|-----------|----------|-------------|
| 175/70 R 14 | 201 583 00 16 | 46 320 |
| 175 R 14 | 123 583 00 16 | 46 325 |
| 185 R 14 | 107 583 00 16 | 46 328 |
| 195/70 R 14 | | |
| 205/70 R 14 | 126 583 00 16 | 46 329 |
| 215/70 R 14 | 116 583 00 16 | 46 331 |
| 185 R 15 | | |
| 205/65 R 15 | 107 583 01 16 | 46 384 |

140-18812

140-25705

**Mercedes-Benz non-skid chains without gripping studs RUD-matic system** (starting 1983)

| Tire size | HW-part no. | Code no.[1] |
|---|---|---|
| 175/70 R 14 | 758 0265 | 44 320 |
| 175 R 14 | 758 0266 | 44 325 |
| 185 R 14 | 758 0267 | 44 328 |
| 195/70 R 14 | | |



140–25706

**Additionally recommended non-skid chains Erlau-Quadrat-m** (up to 1982)

| Tire size | Part no./code no.[1] |
|---|---|
| 175 R 14 | 417-048 |
| 185 R 14 | 417-056 |
| 195/70 R 14 | 417-059 |
| 205/70 R 14 | 417-057 |
| 215/70 R 14 | 417-054 |
| 185 R 15 | 417-061 |
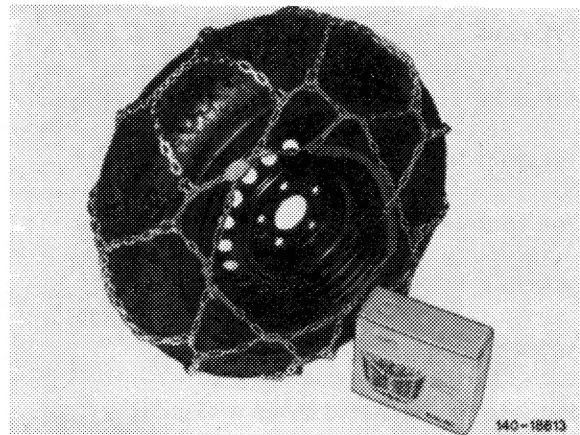


143–18813

**Milz ring chain**

| Tire size | Without gripping studs Y-grip pattern code no.[1] | With gripping studs Y-super grip pattern code no.[1] |
|---|---|---|
| 175/70 R 14 | 60 or 20 060 | — |
| 175 R 14 | 70 or 20 070 | 23 070 |
| 185 R 14 195/70 R 14 | 80 or 20 080 | 23 080 |
| 205/70 R 14 | 90 or 20 090 | 23 090 |
| 215/70 R 14 | 100 or 20 100 | 23 100 |
| 165 R 15 | 90 or 20 090 | 23 090 |
| 205/65 R 15 | 90 or 20 090 | 23 090 |
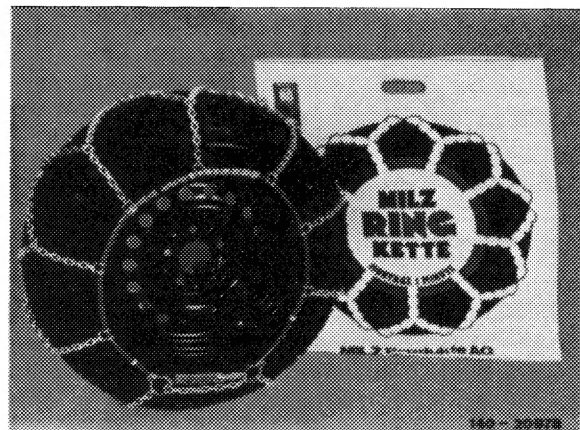
**RUD-"non skid"** (up to 1982)

| Tire size | Part no.[1] |
|-----------|-------------|
| 175 R 14 | 07 125 |
| 185 R 14 | 17 128 |
| 195/70 R 14 | 16 127 |
| 205/70 R 14 | 16 129 |
| 215/70 R 14 | 16 131 |
| 185 R 15 | |



140-22808

**RUD-matic**
**type "non-skid"** (starting 1983)

| Tire size | Part no.[1] |
|-----------|-------------|
| 175/70 R 14 | 46 120 |
| 175 R 14 | 46 125 |
| 185 R 14 195/70 R 14 | 46 128 |
| 205/70 R 14 | 46 129 |
| 215/70 R 14 | 46 131 |
| 185 R 15 | 46 131 |
| 205/65 R 15 | 46 184 |



140-25707
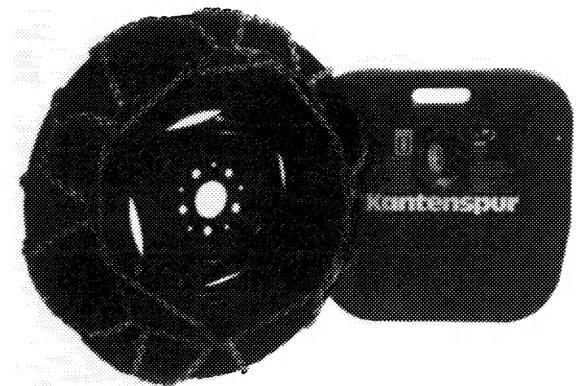
[1]) Code numbers or part numbers are each stamped-in at closing hook of tensioning chain or at outer (red) steel rope ring.